
Roll-Up Lite



A TABLETOP VARIABLE-SPEED MATERIAL ROLLING MACHINE



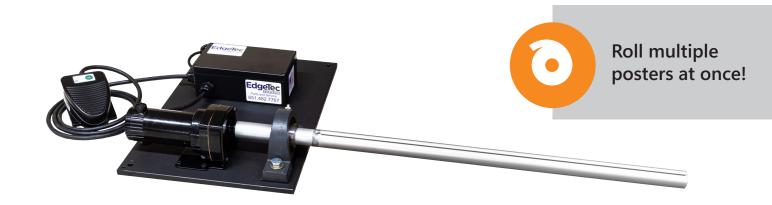

Slit Shaft

Materials are inserted into a non-damaging slit.



Vacuum Shaft

Air suctions material to the shaft through machined holes.



Friction Shaft

A coated silicone shaft gently grips materials.



Clamp Shaft

A pneumatic clamp holds materials to the shaft.


The EdgeTec Roll-Up Lite is a variable-speed material rolling machine with individually designed and fabricated shafts.

A small-but-mighty tabletop roller, the Roll-Up Lite is the perfect machine for businesses that need continuous rolling capabilities for light to medium-weight, non-bulky materials like paper or fabric.

The operation of the Roll-Up Lite is quick to learn and features simple foot pedal operation to rotate the shaft and roll the material. The machine's rotation speed is easily adjusted via a speed control knob.

The shaft of every EdgeTec Roll-Up Lite is fabricated in collaboration with the client and tested with client-provided sample materials to ensure perfect operation and smooth, uncreased materials.

We'll work with you to determine the best shaft style for your materials.

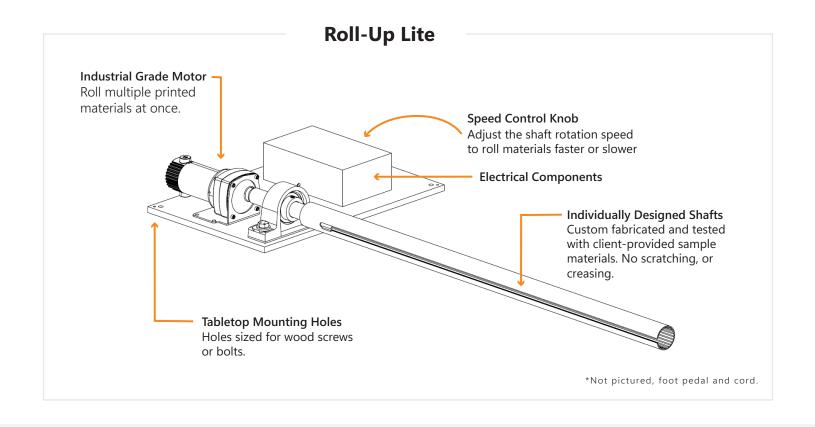

Shaft Categories and Styles

| Extruded Aluminum Profile* | Material is rolled around an aluminum shaft with a specially designed and rounded edge slit to ensure no damage or marring of the rolled material. Slit size is customizable. Extruded Aluminum Profile Shafts are available in a wide variety of diameters. Common diameters include 30mm and 40mm. Available Shaft Styles: Slit or Clamp Shaft |
|-------------------------------|---|
| Internal Shaft* | Material is rolled inside of the shaft. Internal rolling can produce a tighter, smaller diameter roll and works well for rigid materials. Available Shaft Styles: Slit Shaft |
| Round Aluminum Shaft* | Aluminum tubing in nearly any diameter and wall thickness is machined with a full or partial slot to roll material. Available Shaft Styles: Slit or Vacuum Shaft |
| Silicone Coated Shafts | A custom-coated silicone shaft gently grips material without any damage or creases. After rolling, the operator slides a bag or container over the material and the machine releases the rolled product. Good for recycled papers or thick materials. Available Shaft Styles: Friction Shaft |

^{*}Available as an anodized shaft. Anodizing increases durability and eliminates possible shaft residue on materials.

Roll-Up Lite Specifications

| Machine Type | A Variable-Speed Material Rolling Machine |
|---|---|
| Working Speed | Max. Shaft Rotation: 389 rotations per minute Max. Material Rolling Speed: ~144 ft/min, dependent on material. Approximately, 6-10 posters per minute. Shaft rotation speed can be adjusted using machine's speed control knob. |
| Rolling Height | Tabletop Height |
| Shaft Length | Customizable between 0.79" - 48" |
| Machine Makeup | Base: HDPE work surface High-grade industrial components |
| Machine Weight | 25 lbs |
| Base Machine Dimensions (L x W x H) | 20" x 13" x 5" (Without Shaft) |
| Electrical Requirements | 110 VAC, 50/60Hz, 1 Phase OR 220 VAC, 50/60Hz, 1 Phase |

Additional Features

| Shaft Inserts | For difficult-to-roll materials, a variety of inserts are used to prevent slippage. |
|-----------------------------|--|
| Additional Customization | Each machine is custom built. Any modifications to size can be made to fit your needs. |