


Inline L-Clip

PRECISION TAPE HEADS FOR ANY BOX, ANY LINE



The Inline L-Clip Head delivers precise, reliable, and versatile tape application for a wide variety of packaging needs!

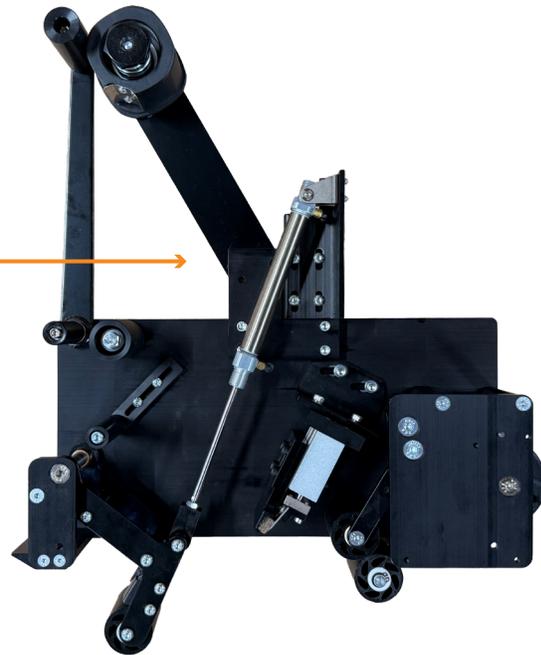

The EdgeTec Inline L-Clip is a versatile tape head engineered for end-of-line packaging. It applies tape at speeds of up to 70 boxes per minute, depending on size and configuration.

The Inline L-Clip runs from a single tape head to an unlimited number, mounted in virtually any position.

Heads can integrate with existing equipment, pair with EdgeTec case sealers, or be incorporated into new machine designs.

This flexibility supports nearly any taping configuration: leading and trailing L-Clips, C-Clips, or center seams.

It also works across a wide range of box styles, from RSC to custom designs. The result is a secure closure with zero tape waste.

Common Inline L-Clip Taping Configurations



Top L-Clip



Bottom L-Clip



C-Clip
(For boxes under 2')



Center Seam Top
and Bottom



Leading and Trailing
Top L-Clips



Leading and Trailing
Bottom L-Clips



Leading Dual Head
Top L-Clips



Leading Dual Head
Bottom L-Clips



Leading and Trailing Dual
Head Top L-Clips



Leading and Trailing Dual
Head Bottom L-Clips



Bypass Mode

More Options
Available!

Inline L-Clip

Sensors*

No Tape / No Cut Sensors detect tape head operations to ensure a secure closure.

Machine-Length Rolls


Less downtime with larger tape rolls.

Pneumatic Cut

Ensures a clean cut on all pieces of tape.

Mirroring

Plates can be mirrored with tape line facing either left or right.

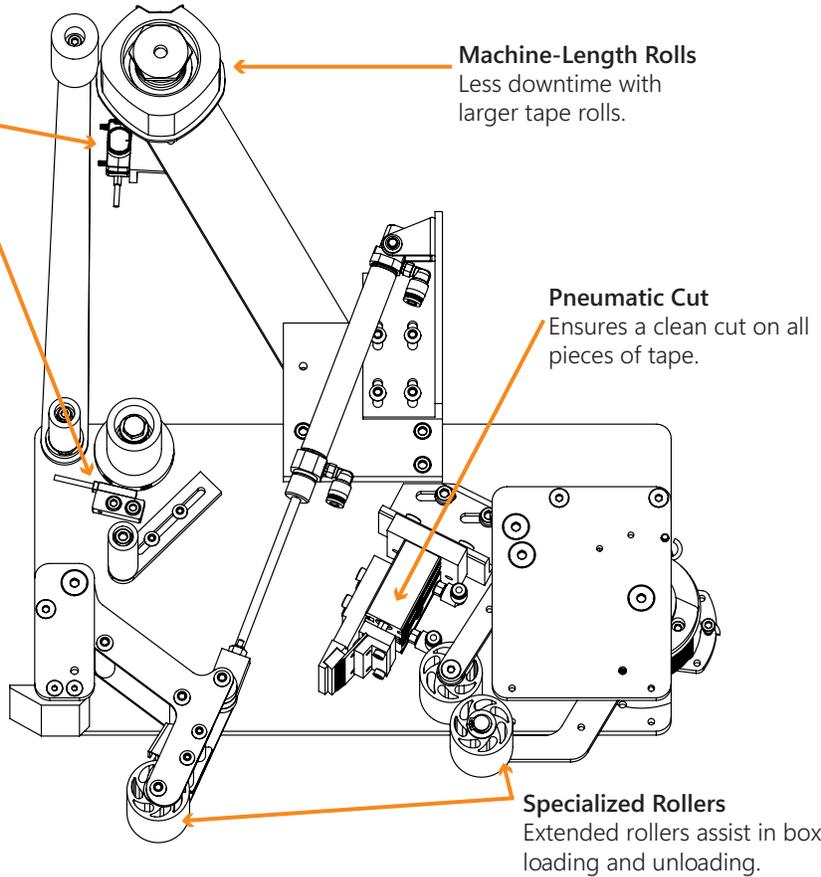

Specialized Rollers

Extended rollers assist in box loading and unloading.

*Optional Feature

Flexible Controls

Use our controls or integrate seamlessly into your own system for reliable operation.

Tape Widths

Whatever tape you are running, we have a head that can apply it! 1", 2", 3"? We've got you covered.

Need something different?

We'll work with you to integrate the tape head on conveyors, case sealers, or fully automated systems.

Inline L-Clip Specifications

Application Type	Versatile inline L-Clip tape head
Machine Makeup	Industrial strength 12-gauge steel (powder coated for durability), anodized 6061 aluminum and high-grade industrial components
Speeds	75 ft/min standard, no minimum to up to 120 ft/min
Multi Head Center to Center	2" or less tape width at 3.110" 3" tape width at 4.110"
Box Width Minimum	2" or less tape at 6.125" 3" tape at 8.125"
Tape Sizes	Standard: 2" wide pressure sensitive tape, up to 15" diameter rolls Optional: 3" wide tape Optional: Custom tape widths between 1/2" to 2"
Tape Type	Filament, BOPP, Flat Back, PVC
Head Weight	20 pounds
Tape Leg Length	Standard machine applies up to 2.25" on the vertical box wall and a minimum of 2.5" on the horizontal box wall consistently.

Optional Features

All-Electric	The same high-quality taping machine, no compressed air needed.
Inline Air Filter	For situations where clean compressed air is not always available.
Low Tape Sensor	Warns operators when tape is low with light and horn alerts.
No Apply / No Cut Sensors	Ensures tape is applied and cut correctly, reducing errors and downtime.