


# Roll-Up Pro

A VARIABLE-SPEED MATERIAL ROLLING MACHINE

**EdgeTec**  
AUTOMATION

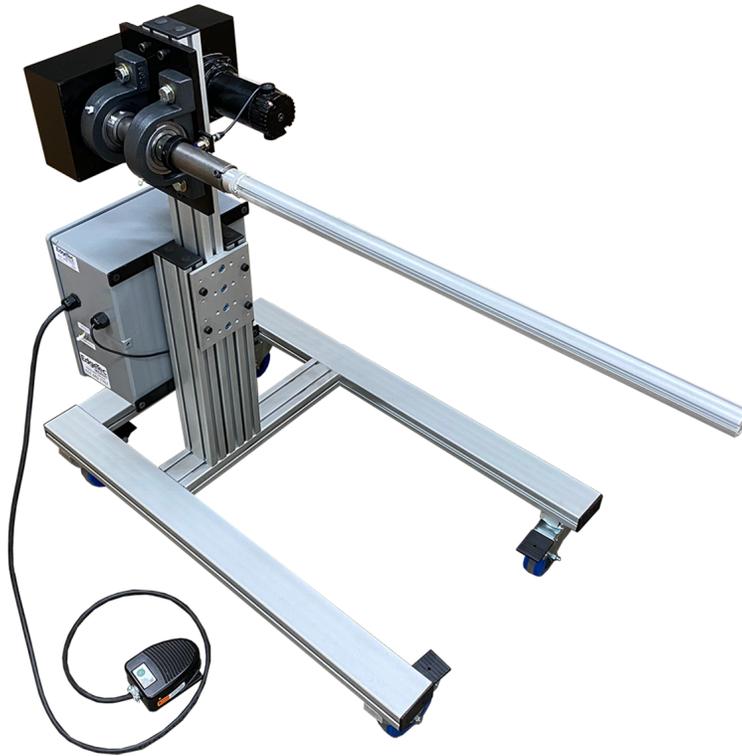

Roll multiple posters  
at once!



Easy to learn.  
Quick to operate.



## Slit Shaft

Materials are  
inserted into a  
non-damaging slit.



## Vacuum Shaft

Air suctions material  
to the shaft through  
machined holes.



## Friction Shaft

A coated silicone  
shaft gently grips  
materials.



## Clamp Shaft

A pneumatic clamp  
holds materials to  
the shaft.


## The EdgeTec Roll-Up Pro is a variable-speed material rolling machine with individually designed and fabricated shafts.

The Roll-Up Pro is a freestanding unit that can roll it all — from lightweight posters to heavy weight fabrics and materials. The operation of the Roll-Up Pro is quick to learn and features simple foot pedal operation to rotate the shaft and roll the material. The machine's rotation speed is easily adjusted via a speed control knob.

Preprogrammed commands include a shaft home position for quick material loading and a slight reverse at the end of rolling, releasing tension for easy removal of the product. Casters on the base of the machine make moving it a breeze!

The shaft of every EdgeTec Roll-Up Pro is fabricated in collaboration with the client and tested with client-provided sample materials to ensure perfect operation and smooth, uncreased materials.

# Roll-Up Pro

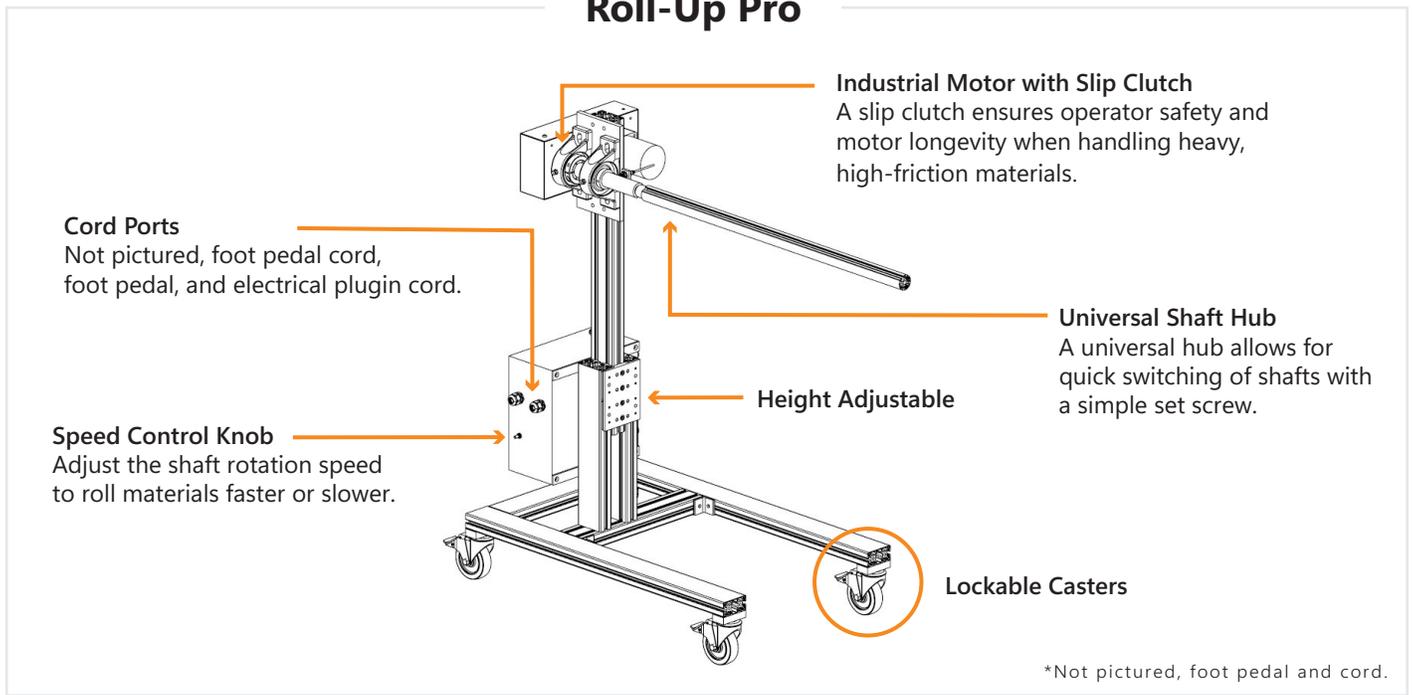

## Shaft Categories and Styles

<b>Extruded Aluminum Profile*</b>	Material is rolled around an aluminum shaft with a specially designed and rounded edge slit to ensure no damage or marring of the rolled material. Slit size is customizable. Extruded Aluminum Profile Shafts are available in a wide variety of diameters. Common diameters include 30mm and 40mm. <b>Available Shaft Styles: Slit or Clamp Shaft</b>
<b>Internal Shaft*</b>	Material is rolled inside of the shaft. Internal rolling can produce a tighter, smaller diameter roll and works well for rigid materials. <b>Available Shaft Styles: Slit Shaft</b>
<b>Round Aluminum Shaft*</b>	Aluminum tubing in nearly any diameter and wall thickness is machined with a full or partial slot to roll material. <b>Available Shaft Styles: Slit, Vacuum Shaft or Clamp Shaft</b>
<b>Silicone Coated Shafts</b>	A custom-coated silicone shaft gently grips material without any damage or creases. After rolling, the operator slides a bag or container over the material and the machine releases the rolled product. Good for recycled papers or thick materials. <b>Available Shaft Styles: Friction Shaft</b>

\*Available as an anodized shaft. Anodizing increases durability and eliminates shaft residue on materials.

## Roll-Up Pro Specifications

<b>Machine Type</b>	Variable-speed material rolling machine
<b>Working Speed</b>	Max Shaft Rotation: 389 rotations per minute Max Material Rolling Speed: ~144 ft/min, dependent on material. Approximately, 6-10 posters per minute. Shaft rotation speed can be adjusted using machine's speed control knob.
<b>Rolling Height</b>	34" - 46" Can be customized upon request.
<b>Shaft Length</b>	Customizable from 0.79" - no upper limit. Shafts over 56" may require steady rest.
<b>Machine Makeup</b>	Frame: Extruded aluminum High-grade industrial components
<b>Machine Weight</b>	116 lbs
<b>Machine Dimensions (L x W x H)</b>	36" x 23" x 40" (Without shaft)
<b>Electrical Requirements</b>	110 VAC, 50/60Hz, 1 Phase or 220 VAC, 50/60Hz, 1 Phase

## Additional Features

<b>Pneumatic Steady Rest</b>	For long shafts, over 56", the steady rest reduces sway and automatically disengages when rolling is finished.
<b>Shaft Inserts</b>	For difficult-to-roll materials, a variety of inserts are used to prevent slippage.
<b>Additional Customization</b>	Each machine is custom built. Any modifications to size can be made to fit your needs.